

CERTIFICATE

on the evaluation of recyclability within the paper industry

FLÖTER Verpackungs-Service GmbH
Robert-Bosch-Straße 17
71701 Schwieberdingen
DEUTSCHLAND

On the basis of the laboratory analysis and in accordance with the criteria of the PTS method PTS-RH 021:2012 (Draft Oct 2019) the sample described below

Product name	AirWave-PaperWave-Bio
Product description	The semi-finished packaging product sample AirWave-PaperWave-Bio is an unprinted paper made of unbleached recycled fibres. The paper (25 g/m²) has an one-side barrier coating (18 g/m²). The coating material is compostable Potato starch blend.
Product category acc. to PTS-RH 021:2012	II – Packaging products as well as paper and board (for the manufacture of packaging products)
Recyclable percentage¹	52.2 %


is classified as

‘recyclable, but worthy of product design improvement.’

Within standard stock preparation of the packaging paper industry.

This certificate loses its validity in case of qualitative or quantitative changes of the components of the tested sample and is only applicable in connection with the test report No. AB.0003037-2 dated 12th July 2021.


Heidenau, 21th July 2021.

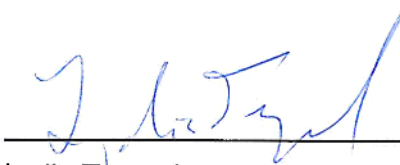

Lydia Tempel
Head of Department
Recycling & Digitalisation



PTS
FIBRE based solutions
Papiertechnische Stiftung
Pirnaer Straße 37 · 01809 Heidenau
www.ptspaper.de

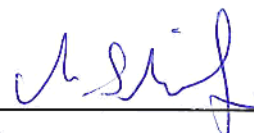

Mike Schiefer
Method supervisor

¹ Recyclable percentage (Fibre yield) means the percentage suitable for recycling or usable in papermaking. It corresponds to total mass of the sample (50g oven-dry \pm 100%) less total reject